

### Facestock

A glossy white conformable polypropylene with highly absorbent surface structure specifically designed for water-based inkjet printing (WBIJ) with both dye and pigment based inks.

|              |                     |         |
|--------------|---------------------|---------|
| Basis Weight | 83 g/m <sup>2</sup> | ISO 536 |
| Caliper      | 80 µm               | ISO 534 |

### Adhesive

A general purpose permanent, acrylic based adhesive.

### Liner

BG40 white, a supercalendered glassine paper.

|              |                     |         |
|--------------|---------------------|---------|
| Basis Weight | 61 g/m <sup>2</sup> | ISO 536 |
| Caliper      | 54 µm               | ISO 534 |

### Laminate

|               |            |         |
|---------------|------------|---------|
| Total Caliper | 153 µm±10% | ISO 534 |
|---------------|------------|---------|

### Performance data

|                        |               |              |
|------------------------|---------------|--------------|
| Initial Tack           | 11 N/25mm     | FTM 9 Glass  |
| Peel Adhesion 90°      | 7 N/25mm      | FTM 2 St.St. |
| Min. Application Temp. | 5 °C          |              |
| Service temperature    | -20°C to 80°C |              |

### Adhesive Performance

S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

### Applications and use

The product is used in a variety of labelling applications printed with WBIJ technology, where there is a need for conformability to a container shape. This facematerial is ideal for labelling of plastics e.g. PE containers. The face material is designed to give excellent density, print definition and vivid colours with photo ink. Quick drying and enhanced moisture resistance offer good handleability after printing.

Special care should be given during dispensing around the gum free area

### Conversion & printing

The material has been designed for water-based inkjet printing. Due to the nature of this printing technology, applications that require a high level of waterfastness may need overvarnishing to protect the print.

The special product lay-out could have an influence on conversion speed

### Special Approvals

S692N complies with European food regulation 1935/2004/EC, with the German Recommendation (BfR) XIV and with FDA § 175.105. It also meets the demands of the limit values laid down in 10/2011/EU. In accordance with the requirements of relevant EU food regulations, the adhesive S692N may safely stand in direct contact with dry, moist and fatty foodstuffs which have a reduction factor of at least 3 according to the Commission Regulation (EU) No 10/2011.


### Shelf life

One year under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

## BL670

### Fasson ®

@WBIJ PP80 SQUEEZE WHITE -  
S692N-BG40WH

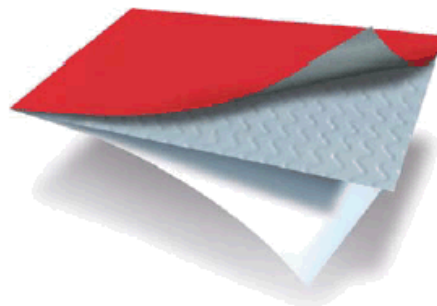

WBIJ PP80 SQUEEZE  
WHITE

S692N

BG40WH

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

**Avery Dennison Materials Group Europe**

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

**Warranty**

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.