

### Facestock

A glossy white polypropylene with highly absorbent surface structure specifically designed for water-based inkjet printing.

Basis Weight	73 g/m <sup>2</sup>	ISO 536
Caliper	89 µm	ISO 534

### Adhesive

A general purpose permanent, acrylic based adhesive.

### Liner

BG40 white, a supercalendered glassine paper.

Basis Weight	60 g/m <sup>2</sup>	ISO 536
Caliper	53 µm	ISO 534

### Laminate

Total Caliper	161 µm±10%	ISO 534
---------------	------------	---------

### Performance data

Initial Tack	10 N/25mm	FTM 9 Glass
Peel Adhesion 90°	6 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 80°C	

### Adhesive Performance

S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

### Applications and use

The product is used in a variety of labelling applications short runs, last minute changes, personalised and customized designs are used. The product is a result of the emerging demand for short run colour print, both in business and at home. The face material is designed to give excellent density, print definition and vivid colours with pigment and dye based inks. Quick drying and enhanced moisture resistance ensure the product is suitable for roll-to-roll applications.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

### Conversion & printing

The face material has been designed for water-based inkjet printing with both dye and pigment based printing machines and is also suitable for Thermal Transfer printers with a wax-resin ribbon. Due to the nature of this printing technology, applications that require a high level of waterfastness may need overvarnishing to protect the print.

### Special Approvals


S692N complies with European food regulation 1935/2004/EC, with the German Recommendation (BfR) XIV and with FDA § 175.105. It also meets the demands of the limit values laid down in 10/2011/EU. In accordance with the requirements of relevant EU food regulations, the adhesive S692N may safely stand in direct contact with dry, moist and fatty foodstuffs which have a reduction factor of at least 2 according to the Commission Regulation (EU) No 10/2011.

The face material is compliant 1935/2004 and 10/2011 requirements for direct contact with all types of food for long term, room-temperature applications. The non-printed side is able to stand in direct contact with food.

## AW393

## Fasson®

### WBIJ PP90 GLOSS WHITE - S692N-BG40WH FSC

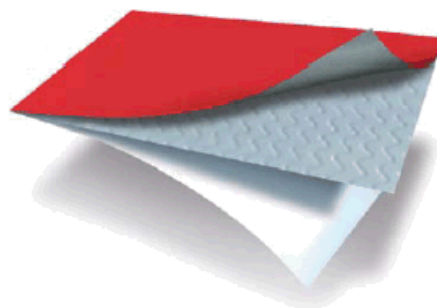

WBIJ PP90 GLOSS WHITE

S692N

BG40WH FSC

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

**Shelf life**

One year under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

**Avery Dennison Materials Group Europe**

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

**Warranty**

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.